

SFP-ER

Miniature Ethernet Copper Range-Extension Device



- Point-to-point Ethernet connectivity with rates up to 100 Mbps
- Eliminates the need for new fiber installation
- Extends the 100 m (328 ft) distance limit for Ethernet connectivity over single or double copper pairs up to 550m (1804 ft)
- Small-Form-Factor that can be plugged into any Ethernet switch with SFP ports

System™
on an **SFP**

SFP-ER is a Small-Form-Factor, Ethernet extender that improves bandwidth and distance of existing copper lines. It helps avoid installation of new fiber lines at customer sites.

Housed in a Small Form-Factor Pluggable (SFP) enclosure, it is designed for quick and simple insertion into any 100BaseFx Ethernet port with an MSA-compatible socket.

MARKET SEGMENTS AND APPLICATIONS

SFP-ER is intended for indoor applications and is used for point-to-point Ethernet connectivity.

SFP-ER is based on the proprietary RAD patent that allows full 100 Mbps Ethernet bandwidth to be extended over 2-wire, 4-wire or 8-wire copper lines (full duplex on each pair).

OPERATION AND MAINTENANCE

Installation

SFP-ER is a book-end solution that can work only with an additional SFP-ER.

Follow the instructions below to install and connect SFP-ER:

- Plug SFP-ER into a device/switch with a 100 Mbps Serdes interface. Repeat the this step for the additional SFP-ER device

Connection

- Connect SFP-ER devices using a straight cable:
 - 2-wire cable: use pins 1 and 2
 - 4-wire cable: use pins 1, 2, 3 and 6
 - 8-wire cable: use pins 1-8.
- Always connect SFP-ER to another SFP-ER device. If an SFP-ER was connected to a regular port of any Ethernet device, such as a switch, reset SFP-ER by unplugging and re-inserting the unit.
- Link synchronization may take around one minute

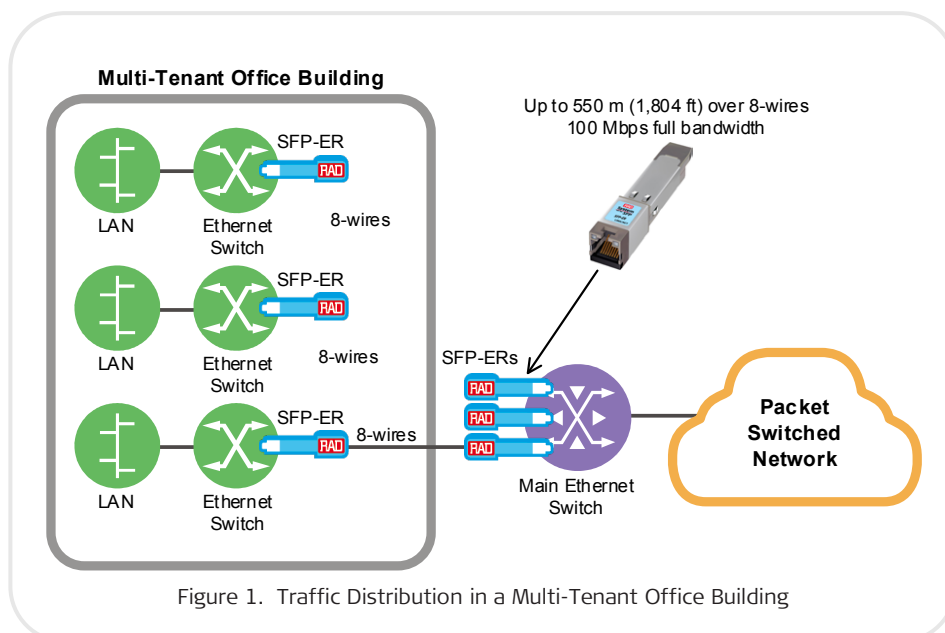


Figure 1. Traffic Distribution in a Multi-Tenant Office Building



Your Network's Edge

SFP-ER

Miniature Ethernet Copper Range-Extension Device

Specifications

HOST INTERFACE

Type

100 Mbps TX Serdes

Host Edge Connector

SFP-based, MSA-compliant

Range

See Table 1 for a list of ranges

Connector

RJ-45

Data Rate

100 Mbps

GENERAL

The SFP-ER components are lead-free

Indicators

LINK/ACT (green) -

On: Ethernet link is OK

Blinking: Data is being transmitted or received

SPD (yellow) -

On: Extended range is linked at 100 Mbps

Physical

Height: 12.4 mm (0.48 in)

Width: 14.0 mm (0.55 in)

Depth: 74.1 mm (2.91 in)

Weight: 30.0g (1.06 oz)

Power

3.3V

Power Consumption

1.0W

Environment

Temperature:

Operating: 0 to 50°C (32 to 122°F)

Storage: -40 to 85°C (-40 to 185°F)

Humidity: Up to 90%, non-condensing

Ordering


SFP-ER

Note: Regardless of the cable length, the cable should be crimped exactly according to the standards. For reference, see Table 2.

Table 1. Operation Range over CAT5e Cable

Rate [Mbps]	Pairs	Error-Free		BER<10 ⁻¹⁰	
		[m]	[ft]	[m]	[ft]
100	4	550	1804	575	1886
	2	250	820	300	984
	1	300	984	300	984

Table 2. Cable Color Coding

Pin	Pair	Wire		
1	3	1		white/green
2	3	2		green
3	2	1		white/orange
4	1	2		blue
5	1	1		white/blue
6	2	2		orange
7	4	1		white/brown
8	4	2		brown

127-103-07/16 (1.0) Specifications are subject to change without prior notice. © 1988-2016 RAD Data Communications Ltd. RAD products/technologies are protected by registered patents. To review specifically which product is covered by which patent, please see ipr.rad.com. The RAD name, logo, logo type and the product names MINU, Optinix, Airmux, and ipmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

International Headquarters

24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com



12 avenue des prés
78059 St Quentin en Yvelines

Tel: 33 (0)1 77 55 03 00
Fax: 33 (0)1 30 44 11 95

E-mail: sales@cbnetworks.fr

