

FCD-E1E

Managed E1 and Fractional E1 Access Device



TDM multiplexer enables Ethernet, Sub-E1 and Serial Services over E1

- E1 main link and sublink supporting both framed and unframed signals
- One data port with selectable sync data rates of $n \times 64$ kbps
- Optional sub-E1 drop-and-insert port
- Optional Ethernet 10/100BaseT bridge (with or without VLAN support)
- Inband management with SNMP agent

FCD-E1E is a managed access unit that converts rates and interfaces for E1 and fractional E1 services.

FCD-E1E features a serial $n \times 64$ kbps data user interface, and/or an Ethernet LAN interface to allow LAN-to-LAN connectivity over TDM media.

The unit interconnects with RAD's modular DXC (DACS) products and E1 equipment from other vendors, to support multilink star applications such as access to SDH networks, FCD, and Megaplex units.

The E1 interface is compatible with virtually all carrier-provided E1 services and meets ITU recommendations G.703, G.704, G.706, G.732, G.823, and G.826.



FCD-E1E

Managed E1 and Fractional E1 Access Device

FCD-E1E supports both 2 and 16 frames per multiframe, with or without CRC-4. The E1 interface also accepts a 2048-kbps data stream and converts it to an ITU-T Rec. G.703 unframed signal for transport over the E1 main link and sublink. Line code is HDB3/AMI. The integral LTU ensures a range of up to 2 km (1.2 miles) and is software selectable.

The optional sub-E1 port can be configured to work without CRC-4, while the E1 main link is working with CRC-4. E1 equipment not supporting CRC-4 can thus connect to an E1 network that does work with CRC-4.

Bypassing the sub-E1 port to the main link ensures uninterrupted service to the sub-E1 port and full immunity to hardware and power failure.

The unit can be configured to assign data from the data port into consecutive timeslots or the user can assign timeslots manually.

Multiple clock source selection ensures maximum flexibility. Timing for the E1 main link and sublink may come from the recovered receive clock, an internal oscillator, or the data port.

An optional 10/100BaseT Ethernet port can be ordered for management, with or without bridge functionality.

Note: *The devices originally ordered with management only functionality (/UTPM) can be upgraded to the /UTP (bridge and management) functionality by ordering a special software license key (see Ordering).*

Front-panel LEDs indicate power, alarms, and diagnostic loopback operation. Rear panel LEDs on the E1 interfaces indicate local and remote sync loss. Rear-panel LEDs on the optional Ethernet port indicate link integrity and activity.

FCD-E1E is available in two models:

- Plastic enclosure (FCD-E1E)
- Metal enclosure with LCD and push-buttons on the front panel (FCD-E1E/L).

Both enclosures can be mounted alone or in pairs in a 19-inch rack using RAD's optional rack mount kits (see *Ordering*).

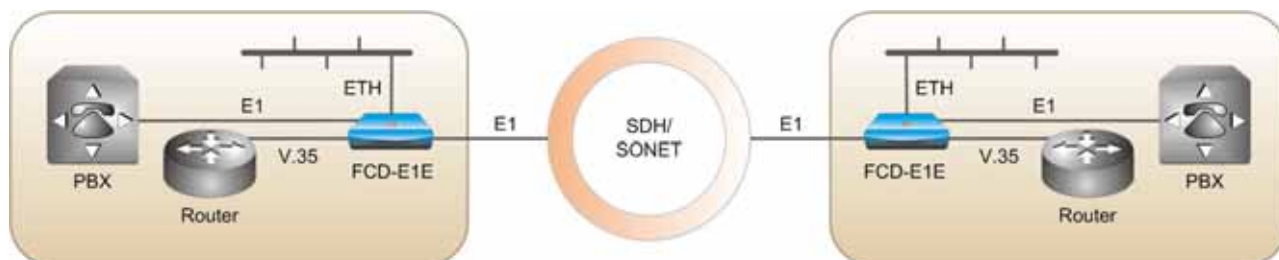


Figure 1. Point to Point Ethernet, Data and Fractional E1 over E1

USER INTERFACES

The FCD-E1E unit features the following user interfaces:

- Serial data interfaces: V.24/RS-232, V.35, V.36/RS-449, RS-530, X.21
- Ethernet 10/100BaseT LAN interface.

The synchronous data ports of FCD-E1E operate in the following clock modes:

- DCE: FCD-E1E provides both transmit and receive clocks to the user equipment, with optional sampling of the incoming data with an inverted clock
- DTE1: FCD-E1E provides the receive clock, while the transmit clock is provided by the attached user equipment (not for X.21 and V.24)
- DTE2: The remote user equipment provides both transmit and receive clocks (not for X.21 and V.24).

The optional bridge port is a standard 10/100BaseT half/full-duplex port featuring autonegotiation and automatic crossover support. Its interface supports VLAN frames, automatic learning and aging. The bridge port transparently connects FCD-E1E to remote LANs over E1 links. It filters Ethernet frames and forwards only frames that are destined for the WAN.

MANAGEMENT AND MAINTENANCE

Status and diagnostic information is defined, configured, and monitored using any of the following methods:

- Menu-driven management using the front panel LCD with three pushbuttons (metal enclosure only)
- ASCII terminal connected to the async control port
- Telnet (only with optional Ethernet port)
- RADView element manager (only with optional Ethernet port).

Up to 2048 time-stamped alarms can be retrieved through the supervision terminal.

Maintenance capabilities include user-activated local and remote loopbacks on the E1 main link, sublink, and data port. The user can activate a BER test on the main link or sublink.

E1 network statistics are stored in memory, according to IETF RFC4805. Statistical information can be retrieved locally through the control port.

FCD-E1E performs VLAN tagging and priority labeling according to IEEE 802.1p&Q (enhanced QoS, supporting strict/weighted fair queue mechanism, with 802.1p/DSCP/IP Precedence priority). The unit performs rate limiting (egress and ingress).

FCD-E1E

Managed E1 and Fractional E1 Access Device

Specifications

E1 MAIN LINK AND SUBLINK

Framing

256N (no MF, CCS)
256N (no MF, CCS) with CRC-4
256S (TS16 MF, CAS)
256S (TS16 MF, CAS) with CRC-4
Unframed

Bit Rate

2.048 Mbps

Line Code

AMI/HDB3

Zero Suppression

HDB3

Line Impedance

120Ω, balanced
75Ω, unbalanced

Transmit Timing

Locked to the system clock

Signal Level

Receive:

0 to -10 dB short haul
0 to -36 dB long haul

Transmit:

±3V (±10%), balanced
±2.37V (±10%), unbalanced

Jitter Performance: as per ITU G.823,
ETSI TBR-12 and TBR-13

Connectors

RJ-45, 8-pin, balanced
Two BNC coaxial, unbalanced

Compliance

ITU G.703, G.704, G.706, G.732, G.823,
G.826

Performance Monitoring

Local support of CRC-4
Full statistical diagnostics according to
RFC-2495

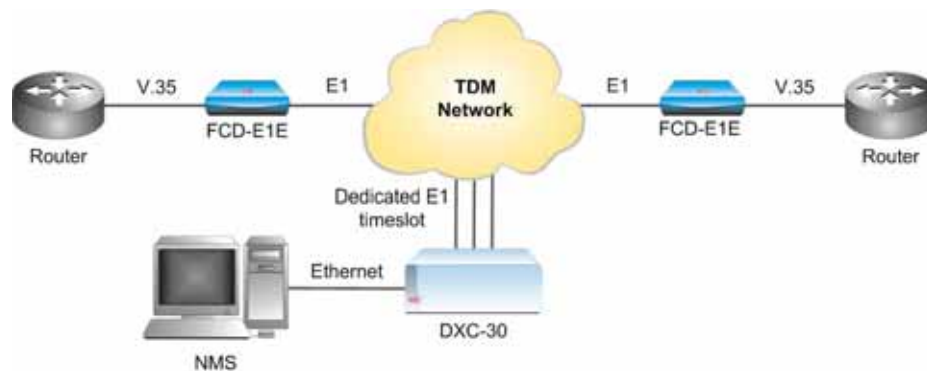


Figure 2. Managed V.35 to E1 Converter

DATA PORTS

Connectors

D-type, 25-pin, RS-530, female
(converted via adapter cables to V.35,
X.21, V.36/RS-449 or V.24/RS-232)

Data Rate

n × 64 kbps (n=1 to 2) for V.24 port
n × 64 kbps (n=1 to 32) for other ports

Clock Modes

DCE: Rx and Tx clock to user device

DTE1: Tx clock to user device;

Rx clock from user device (not for X.21
and V.24)

DTE2: Rx and Tx clock from user device
(not for X.21 and V.24)

Control Signals

CTS follows RTS or constantly ON,
soft-selectable

DSR constantly ON (except during the
remote main link loopback)

DCD constantly ON (except during the
loss of sync on main link)

ETHERNET BRIDGE PORT

Compliance

IEEE 802.3, 802.3u, 802.1p&Q

Interface and Connector

10/100BaseT (UTP) with shielded RJ-45

Data Rate

10 Mbps or 100 Mbps, full or half-duplex

Maximum Frame Length

1800 bytes

LAN Table

2048 MAC addresses

Throughput

4,207 pps

Latency*

0.51 ms (64-byte frame size)

**FCD-E1E to FCD-E1E, 1.6M LAN rate*

Delay

4.437 ms for 1 Mbps (bidirectional,
1518 byte frame size)

Buffer

320 frames

Line Code

10BaseT: Manchester

100BaseT: MLT3

WAN Protocol

HDLC

FCD-E1E

Managed E1 and Fractional E1 Access Device

MANAGEMENT PORTS

CONTROL DCE Port

Interface: RS-232
Connector: 9-pin D-type, female
Format: asynchronous
Baud rate: 9.6–115.2 kbps,
Character: 8-bit no parity

Ethernet Port (optional)

Interface: 10/100BaseT
Connector: RJ-45

DIAGNOSTICS

Main E1 link

Local loopback
Remote loopback
BER test

Sublink

Local loopback
Remote loopback
BER test

Data Port

Local loopback
Remote loopback

GENERAL

System Clock

Internal clock: ± 32 ppm
Loopback timing: ± 100 ppm
External timing from data port: ± 100 ppm

Timeslot Allocation

Consecutive (bundled)
User-defined

Indicators

General:

PWR (green)
TST (yellow)
ALM (red)

Main/sub-E1:

LOC SYNC LOSS (red)
REM SYNC LOSS (red)

Ethernet:

LINK (green) – Ethernet link status
ACT (yellow) – Ethernet activity status

Physical

Plastic enclosure:

Height: 43.7 mm (1.7 in)
Width: 217 mm (8.5 in)
Depth: 170 mm (6.7 in)
Weight: 0.5 kg (1.1 lb)

Metal enclosure:

Height: 43.7 mm (1.7 in)
Width: 215.5 mm (8.48 in)
Depth: 152.7 mm (6.0 in)
Weight: 0.7 kg (1.5 lb)






Power

AC/DC: 100 to 240 VAC, -48 to -60 VDC,
nominal power consumption: 5W max.

Environment

Temperature: 0°C to 50°C (32°F to 122°F)
Humidity: Up to 90%, non-condensing

Table 1. FCD Comparison Table

Features	FCD-E1 	FCD-E1L 	FCD-E1LC/T1LC 	FCD-E1E 	FCD-E1A 
Total user ports	3	2	3	2	3
Interface types	RS-530, V.35, V.36, X.21, Sub-E1	RS-530, V.35, V.36, X.21, Ethernet bridge (10/100BaseT with VLAN support)	RS-530, V.24, V.35, V.36, X.21, Ethernet Bridge (10/100BaseT with VLAN support), Sub-E1/T1	RS-530, V.35, V.36/RS-449, X.21, V.24/RS-232, Ethernet Bridge (10/100BaseT with VLAN support), Sub-E1	RS-530, V.35, V.36/RS-449, X.21, Sub-E1
E1/T1 line type	Copper	Copper	Copper	Copper	Copper
LCD panel	✓	–	–	✓	✓
Auto-configuration	–	✓	–	–	–
SNMP management	✓	✓	✓	✓	✓
Interoperability	Megaplex, DXC	Megaplex, DXC	Megaplex, DXC	Megaplex, DXC	Megaplex, DXC
ETH out-of-band for management	✓	✓	✓	✓	✓
E1 bypass	✓	–	–	✓	✓
ETH performance	–	VLAN transparent	VLAN transparent	VLAN priority tagging (802.1p/Q)	VLAN transparent

FCD-E1E

Managed E1 and Fractional E1 Access Device

Ordering

STANDARD CONFIGURATIONS

FCD-E1E/2E1/UTP/V35/L

FCD-E1E/2E1/UTPM/V35/L

SPECIAL CONFIGURATIONS

FCD-E1E/@/+/&/#

Legend

@ TDM interface:

- 1E1 1 balanced E1 as uplink
- 1E1CX 1 unbalanced E1 as uplink
- 2E1 Balanced E1 and sub E1
- 2E1CX Unbalanced E1 and sub E1

+ Ethernet interface (Default=no Ethernet):

- UTP 10/100BaseT Ethernet port (bridge and management)
- UTPM 10/100BaseT Ethernet port (management only)

& Data port interface:

- V35 V.35
- V36 V.36/RS-449
- 530 RS-530
- X21 X.21
- V24 V.24/RS-232 (asynchronous)

* Enclosure (Default=plastic):

- L Metal, with LCD

FCD-E1E/SW/\$

Software upgrade pack for enabling bridge and management services on the Ethernet port.

Note: When this option is ordered, RAD sends a code for activating the required feature.

SUPPLIED ACCESSORIES

Power cord
AC/DC adapter plug

CBL-HS2/*/#

Adaptor cables for DB-25 channel connectors, for operation in the DCE, DTE1, and DTE2 clock modes. Cable length is 2m (6 ft).

Legend

* Interface, clock mode:

- V/1 34-pin V.35, DCE
- V/2 34-pin V.35, DTE1
- V/3 34-pin V.35, DTE2
- R/1 37-pin V.36/RS-449, DCE
- R/2 37-pin V.36/RS-449, DTE1
- R/3 37-pin V.36/RS-449, DTE2
- X/1 15-pin X.21, DCE

Connector:

- F female
- M male

OPTIONAL ACCESSORIES

CBL-DB9F-DB9M-STR

Control port cable

CBL-RJ45/2BNC/E1

RJ-45 to BNC adaptor cable

RM-33-2

Hardware kit for mounting one or two FCD-E1E units into a 19-inch rack

RM-35/@

Kit for mounting 1 or 2 FCD-E1E/L units (metal enclosure) in a 19-inch rack

Legend

@ Rack mount kit:

- P1 Mounting one unit
- P2 Mounting two units

519-100-06/11 Specifications are subject to change without prior notice. © 1988-2011 RAD Data Communications Ltd. The RAD name, logo, logo type, and the terms EtherAccess, TDMoIP and TDMoIP Driven, and the product names Optimux and Irmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

International Headquarters
24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com



12 avenue des prés
78059 St Quentin en Yvelines

Tel: 33 (0)1 77 55 03 00
Fax: 33 (0)1 30 44 11 95

E-mail: sales@cbnetworks.fr

<http://www.cbnetworks.fr>



data communications

The Access Company