

# FCD-E1LC, FCD-T1LC

## Managed E1/T1 or Fractional E1/T1 Access Units



- Managed access units for E1/T1 or fractional E1/T1 service
- E1/T1 main link and sublink support framed and unframed signals
- One or two data ports with selectable sync data rates:  $n \times 56$  kbps or  $n \times 64$  bps
- Serial data port interfaces: V.24, V.35, V.36/RS-449, RS-530, or X.21
- Optional sub-E1/T1 drop-and-insert port for PBX connectivity
- Optional V.24 serial interface (second user port)

FCD-E1LC and FCD-T1LC are managed access units that convert rates and interfaces for full or fractional E1/T1 services.

These units support a single or dual serial  $n \times 56$  kbps or  $n \times 64$  kbps data user interface.

### INTEROPERABILITY

The FCD-E1LC and FCD-T1LC units interconnect with RAD modular DXC, Megaplex products and E1/T1 equipment from other vendors to support multilink star applications such as access to SDH networks. All these products – DXC, FCD, and Megaplex – operate together under centralized SNMP network management.

### E1 INTERFACE

The E1 interface is compatible with virtually all carrier-provided E1 services and meets ITU recommendations G.703, G.704, G.706, G.732, G.823, and G.826. It supports both 2 and 16 frames per multiframe, with or without CRC-4.

The E1 interface also accepts a 2048 kbps data stream and converts it to an ITU-T Rec. G.703 unframed signal for transport over the E1 main link and sublink. Line code is HDB3. The integral LTU ensures a range of up to 2 km (1.2 miles) and is software-selectable.

The optional sub-E1 port can be configured to work without CRC-4, while the E1 main link is working with CRC-4. This enables connection of E1 equipment not supporting CRC-4, over an E1 network that is working with CRC-4.

### T1 INTERFACE

The T1 interface is compatible with virtually all carrier-provided T1 services, including ASDS from AT&T. It complies with TR-62411 and TR-62421 and supports D4 and ESF framing formats. Zero suppression over the line is software-selectable for either transparent, B7ZS or B8ZS. The software-selectable integral CSU ensures a range of up to 2.1 km (1.3 miles).

The optional sub-T1 port can be configured with D4 or ESF framing, while the T1 main link framing is ESF. This enables connection of T1 D4 equipment over an ESF T1 network.

### CROSS-CONNECT

The FCD-E1LC and FCD-T1LC units can be programmed to assign data automatically from each data port into consecutive timeslots. The user can also assign timeslots manually.

### TIMING

Timing for the E1/T1 main link and sublink may come from the recovered receive clock, an internal oscillator, or one of the data ports. This multiple clock source selection ensures maximum flexibility for supporting different applications.

### PHYSICAL

FCD-E1LC and FCD-T1LC are compact standalone units. A rack mount adapter kit enables installation of one or two (side-by-side) units in a 19-inch rack.



## FCD-E1LC, FCD-T1LC

### Managed E1/T1 or Fractional E1/T1 Access Units

#### USER INTERFACES

The FCD-E1LC and FCD-T1LC units feature the following serial data user interfaces: V.24/RS-232, V.35, V.36/RS-449, RS-530 (V.11/RS-422), X.21.

The synchronous data ports of FCD-E1LC operate in the following clock modes:

- DCE: The FCD units provide both transmit and receive clocks to the user equipment, with optional sampling of the incoming data with an inverted clock
- DTE1: The FCD units provide the transmit clock, while the transmit clock is provided by the attached user equipment
- DTE2: The attached user equipment provides both transmit and receive clocks.

#### MANAGEMENT AND SECURITY

Inband management can be performed either by dedicated timeslot using standard Frame Relay protocol (RFC 1490), or by using the spare Sa bits on timeslot 0 for FCD-E1LC or FDL bits for FCD-T1LC. This allows the user to setup, monitor, and run diagnostics on the remote unit. The spare bits on TS0 or FDL that are used for inband access must be passed transparently end-to-end.

Status and diagnostic information is defined, configured, and monitored using one of the following methods:

- ASCII terminal connected to the async control port
- SNMP management
- Telnet.

All models support an internal SNMP agent that is managed by any generic SNMP station or by the RADview SNMP-based management application.

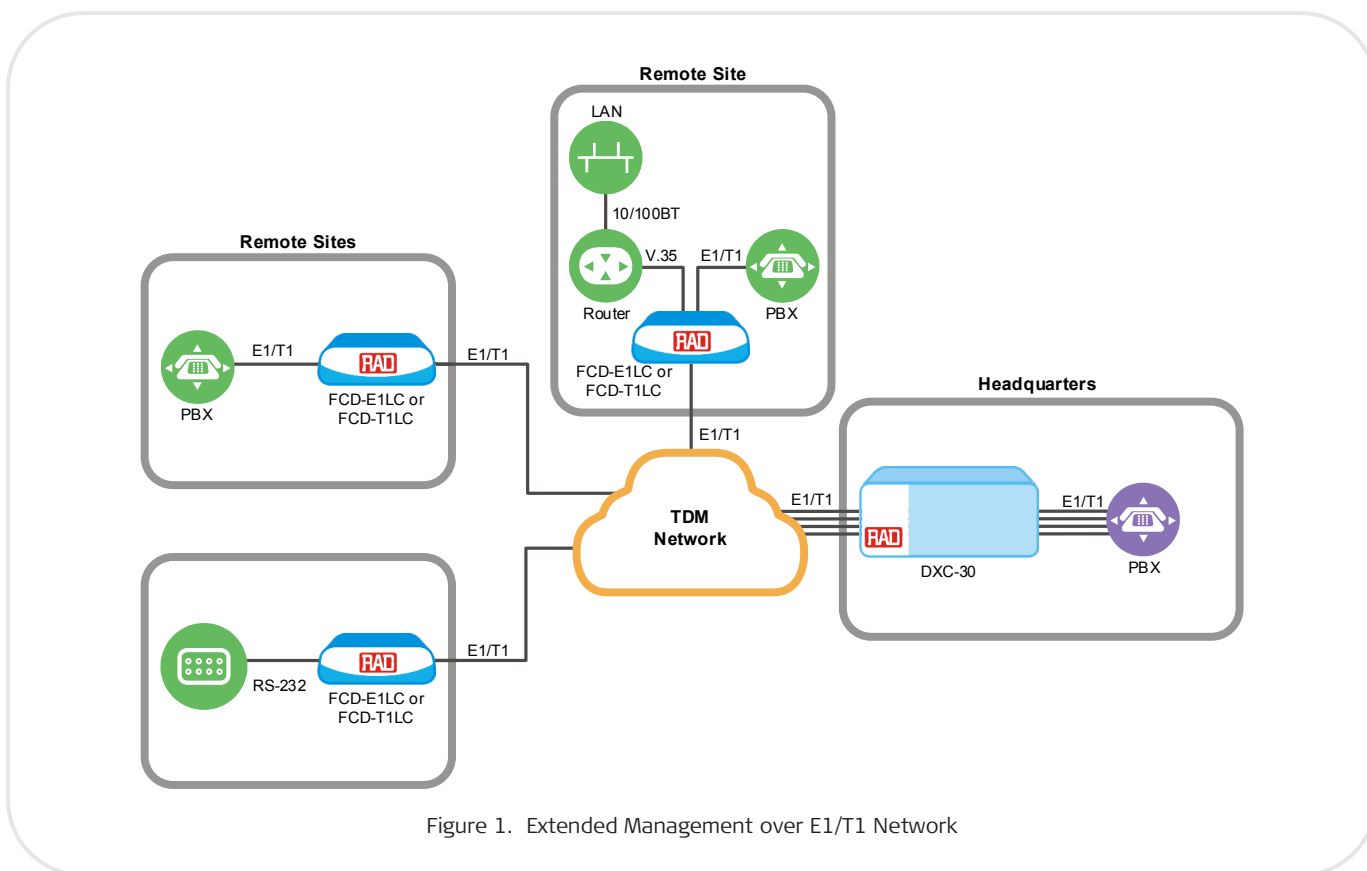


Figure 1. Extended Management over E1/T1 Network

FCD-E1LC and FCD-T1LC support both dial-in and dial-out modem connections through the serial RS-232 port, by using SLIP or PPP protocol or a command line interpreter on an ASCII terminal. These out-of-band connections can be used for remote configuration and monitoring, as well as for sending callout alarm messages.

Up to 100 time-stamped alarms are available for retrieval through the supervision terminal, a Telnet host, or a RADview management station.

#### MONITORING AND DIAGNOSTICS

Front panel LEDs indicate alarms, E1/T1 signal loss, and diagnostic loopback operation.

Maintenance capabilities include user-activated local and remote loopbacks on the E1/T1 main link, sublink, and data ports. The user can activate a BER test on the main link. Also, the main link responds to an ANSI FT1 RDL (T1.403) inband loop code, or a user-configured pattern generated by a remote FCD-E1LC, FCD-T1LC, or DXC in a specific bundle of timeslots allocated only to that port. The user can also define BER or inband tests to run on any timeslot of the main link.

E1 network statistics are stored in memory, according to RFC 1406. Statistical information can be retrieved locally through the control port.

T1 network statistics are stored in memory, according to ANSI and AT&T standards. The statistical information may be retrieved by the service provider (ANSI only) or locally through the control port.

## Specifications

### E1 MAIN LINK AND SUBLINK

#### Framing

256N (no MF, CCS)  
 256N (no MF, CCS) with CRC-4  
 256S (TS16 MF, CAS)  
 256S (TS16 MF, CAS) with CRC-4  
 Unframed

#### Bit Rate

2.048 Mbps

#### Line Code

AMI

#### Zero Suppression

HDB3

#### Line Impedance

120Ω, balanced  
 75Ω, unbalanced

#### Transmit Timing

Locked to the system clock

#### Signal Level

Receive:  
 0 to -10 dB without LTU  
 0 to -36 dB with LTU

#### Transmit:

±3V (±10%), balanced  
 ±2.37V (±10%), unbalanced

#### Jitter Performance

As per ITU G.823, ETSI TBR-12 and TBR-13

#### Connectors

RJ-45, 8-pin, balanced  
 Two BNC coaxial, unbalanced, using adapter cable

#### Compliance

ITU G.703, G.704, G.706, G.732, G.823, G.826

#### Performance Monitoring

Local support of CRC-4  
 Full statistical diagnostics according to RFC-1406

### T1 MAIN LINK AND SUBLINK

#### Framing

D4  
 ESF  
 Unframed (main link only)

#### Bit Rate

1.544 Mbps

#### Line Code

AMI

#### Zero Suppression

Transparent, B7ZS, B8ZS

#### Line Impedance

100Ω, balanced

#### Transmit Timing

Locked to the system clock

#### Signal Level

Receive:  
 0 to -10 dB without CSU  
 0 to -36 dB with CSU

Transmit:  
 -7.5, -15, -22.5 dB with CSU  
 ±3V, ±10% soft adjustable at 0 to 655 ft without CSU

#### T1 Jitter Performance

As per AT&T TR-62411

#### Connector

RJ-45, 8-pin, balanced

#### Compliance

AT&T TR-62411, AT&T 54016, AT&T TR-62421, ANSI T1.403

#### Performance Monitoring

Local support of ESF diagnostics according to AT&T PUB 54016  
 Full statistical diagnostics according to ANSI T1.403-198

## FCD-E1LC, FCD-T1LC

### Managed E1/T1 or Fractional E1/T1 Access Units

#### DATA PORTS

##### Connectors

D-type, 25-pin, RS-530, female  
(converted via adapter cables to V.35,  
X.21, V.36/RS-449)

Additional connectors for second V.24  
user port: D-type, 25-pin, female

##### Data Rate

n × 56/64 kbps (n=1 to 24) for T1  
n × 64 kbps (n=1 to 31) for E1  
n × 64 kbps (n=1 to 2) for V.24 port

##### Clock Modes

DCE: Rx and Tx clock to user device  
DTE1: Rx clock to user device;  
Tx clock from user device (not for X.21  
and V.24)  
DTE2: Rx and Tx clock from user device  
(not for X.21 and V.24)

##### Control Signals

CTS follows RTS or constantly ON, soft-  
selectable  
DSR constantly ON, unless in test mode  
DCD constantly ON, unless in sync loss

#### DIAGNOSTICS

##### Main E1/T1 link

Local loopback  
Remote loopback  
BER test

Code-activated inband loopback per data  
port  
Code-activated T1 network loopback  
(FCD-T1LC only)

##### Sublink

Local loopback  
Remote loopback  
Code-activated T1 network loopback  
(FCD-T1LC only)

##### Data Port

Local loopback  
Remote loopback

#### TIMING

##### System Clock

Internal clock: ±50 ppm  
Loopback timing: ±130 ppm  
External timing from data port: ±130 ppm

#### MANAGEMENT

##### Management Port

Interface: RS-232, 9-pin D-type, female  
Format: asynchronous  
Baud rate: 1.2–115.2 kbps, autobaud  
Character: 8-bit no parity, 7-bit odd or  
even parity

#### GENERAL

##### Timeslot Allocation

Consecutive (bundled)  
User-defined

##### Indicators

General: PWR (green), TST (yellow), ALM  
(red)  
Main/sub-E1: LOC SYNC LOSS (red), REM  
SYNC LOSS (red)  
Main/sub-T1: RED ALARM (red), YEL  
ALARM (yellow)

##### Physical

Height: 4.4 cm (1.7 in)  
Width: 21.7 cm (8.5 in)  
Depth: 17.0 cm (6.7 in)  
Weight: 0.8 kg (1.8 lb)

##### Power

AC/DC: 100 to 240 VAC, -48 to -60 VDC,  
nominal  
Power consumption: 5W max.

##### Environment

Temperature: 0°C to 50°C (32°F to 122°F)  
Humidity: Up to 90%, non-condensing

**FCD-E1LC, FCD-T1LC**

## Managed E1/T1 or Fractional E1/T1 Access Units

**Ordering****RECOMMENDED CONFIGURATIONS****FCD-E1LC/X21**

E1 Access Unit with X.21 data port interface, no sublink, no second data port

**FCD-E1LC/V35**

E1 Access Unit with V.35 data port interface, no sublink, no second data port

**FCD-T1LC/X21/S**

T1 Access Unit with a sublink and X.21 data port interface, no second data port

**FCD-T1LC/530/530**

T1 Access Unit with two RS-530 data port interfaces, no sublink

**FCD-T1LC/530**

T1 Access Unit with a single RS-530 data port interface, no sublink

**FCD-T1LC/V35**

T1 Access Unit with V.35 data port interface, no sublink, no second data port

**SPECIAL CONFIGURATIONS**

Please contact your local RAD partner for additional configuration options

**SUPPLIED ACCESSORIES**

Power cord and AC/DC adaptor plug

The following cables are supplied for each data port interface specified for operating in DCE clock mode:

**CBL-HS2/V/1** for 34-pin V.35

**CBL-HS2/R/1** for 37-pin V.36/RS-449

**CBL-HS2/X/1** for 15-pin X.21

**OPTIONAL ACCESSORIES****RM-33-2**

Hardware for mounting one or two units in a 19-inch rack

**CBL-DB9F-DB9M-STR**

Control port cable

**CBL-RJ45/2BNC/E1/X**

RJ-45 to BNC adaptor cable (for unbalanced main link interface)

**CBL-RJ45/2BNC/E1**

RJ-45 to BNC adaptor cable (for unbalanced sublink interface)

**CBL-HS2/\*/#**

Adaptor cables for DB-25 channel connectors, for operation in the DTE1 and DTE2 clock modes

**Legend**

- \* Interface, clock mode:
  - V/2** 34-pin V.35, DTE1
  - V/3** 34-pin V.35, DTE2
  - R/2** 37-pin V.36/RS-449, DTE1
  - R/3** 37-pin V.36/RS-449, DTE2
- # Cable connector type
  - F** female
  - M** male

**International Headquarters**

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail [market@rad.com](mailto:market@rad.com)



12 avenue des prés  
78059 St Quentin en Yvelines

Tel: 33 (0)1 77 55 03 00  
Fax: 33 (0)1 30 44 11 95

E-mail: [sales@cbnetworks.fr](mailto:sales@cbnetworks.fr)



Your Network's Edge